


SIMATIC S7-1500, ANALOG OUTPUT MODULE AQ 2 X U/I ST, 16 BITS OF RESOLUTION, ACCURACY 0.3 %. 2 CHANNELS IN GROUPS OF 2, DIAGNOSIS, SUBSTITUTE VALUE INCL. FRONT CONNECTOR PUSH-IN, FEEDING ELEM., SHIELDING ELEM., SHIELDING CLAMP

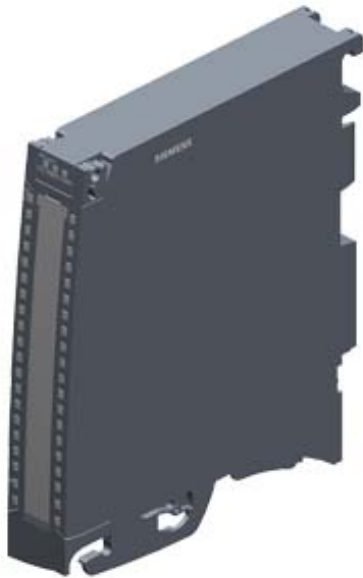

General information	
Product type designation	AQ 2xU/I ST
HW functional status	FS01
Firmware version	V1.0.0
<ul style="list-style-type: none"> <li>FW update possible</li> </ul>	Yes
Product function	
<ul style="list-style-type: none"> <li>I&amp;M data</li> </ul>	Yes; I&M0 to I&M3
<ul style="list-style-type: none"> <li>Output range scalable</li> </ul>	No
Engineering with	
<ul style="list-style-type: none"> <li>STEP 7 TIA Portal configurable/integrated as of version</li> </ul>	V13 / V13.0.2
<ul style="list-style-type: none"> <li>STEP 7 configurable/integrated as of version</li> </ul>	V5.5 SP3 / -
<ul style="list-style-type: none"> <li>PROFIBUS as of GSD version/GSD revision</li> </ul>	V1.0 / V5.1
<ul style="list-style-type: none"> <li>PROFINET as of GSD version/GSD revision</li> </ul>	V2.3 / -
Operating mode	
<ul style="list-style-type: none"> <li>Oversampling</li> </ul>	No
<ul style="list-style-type: none"> <li>MSO</li> </ul>	Yes
CiR – Configuration in RUN	

Reparameterization possible in RUN	Yes
Calibration possible in RUN	Yes
<b>Supply voltage</b>	
Rated value (DC)	24 V
permissible range, lower limit (DC)	20.4 V
permissible range, upper limit (DC)	28.8 V
Reverse polarity protection	Yes
<b>Input current</b>	
Current consumption, max.	110 mA; with 24 V DC supply
<b>Power</b>	
Power available from the backplane bus	0.65 W
<b>Power loss</b>	
Power loss, typ.	2.7 W
<b>Analog outputs</b>	
Number of analog outputs	2
Voltage output, short-circuit protection	Yes
Voltage output, short-circuit current, max.	24 mA
Current output, no-load voltage, max.	22 V
Cycle time (all channels), min.	3.2 ms; independent of number of activated channels
<b>Output ranges, voltage</b>	
• 0 to 10 V	Yes
• 1 V to 5 V	Yes
• -5 V to +5 V	No
• -10 V to +10 V	Yes
<b>Output ranges, current</b>	
• 0 to 20 mA	Yes
• -20 mA to +20 mA	Yes
• 4 mA to 20 mA	Yes
<b>Connection of actuators</b>	
• for voltage output two-wire connection	Yes
• for voltage output four-wire connection	Yes
• for current output two-wire connection	Yes
<b>Load impedance (in rated range of output)</b>	
• with voltage outputs, min.	1 k $\Omega$ ; 0.5 k $\Omega$ at 1 to 5 V
• with voltage outputs, capacitive load, max.	1 $\mu$ F
• with current outputs, max.	750 $\Omega$
• with current outputs, inductive load, max.	10 mH
<b>Cable length</b>	
• shielded, max.	800 m; for current, 200 m for voltage
<b>Analog value generation for the outputs</b>	

Integration and conversion time/resolution per channel	
• Resolution with overrange (bit including sign), max.	16 bit
• Conversion time (per channel)	0.5 ms
Settling time	
• for resistive load	1.5 ms
• for capacitive load	2.5 ms
• for inductive load	2.5 ms
Errors/accuracies	
Output ripple (relative to output range, bandwidth 0 to 50 kHz), (+/-)	0.02 %
Linearity error (relative to output range), (+/-)	0.15 %
Temperature error (relative to output range), (+/-)	0.002 %/K
Crosstalk between the outputs, max.	-100 dB
Repeat accuracy in steady state at 25 °C (relative to output range), (+/-)	0.05 %
Operational error limit in overall temperature range	
• Voltage, relative to output range, (+/-)	0.3 %
• Current, relative to output range, (+/-)	0.3 %
Basic error limit (operational limit at 25 °C)	
• Voltage, relative to output range, (+/-)	0.2 %
• Current, relative to output range, (+/-)	0.2 %
Isochronous mode	
Isochronous operation (application synchronized up to terminal)	No
Interrupts/diagnostics/status information	
Diagnostics function	Yes
Substitute values connectable	Yes
Alarms	
• Diagnostic alarm	Yes
Diagnostic messages	
• Monitoring the supply voltage	Yes
• Wire-break	Yes; Only for output type "current"
• Short-circuit	Yes; Only for output type "voltage"
• Overflow/underflow	Yes
Diagnostics indication LED	
• RUN LED	Yes; Green LED
• ERROR LED	Yes; Red LED
• Monitoring of the supply voltage (PWR-LED)	Yes; Green LED
• Channel status display	Yes; Green LED
• for channel diagnostics	Yes; Red LED
• for module diagnostics	Yes; Red LED

## Potential separation

### Potential separation channels

- |  |     |
|--|-----|
| • between the channels                     | No  |
| • between the channels, in groups of       | 2   |
| • between the channels and backplane bus   | Yes |
| • Between the channels and load voltage L+ | Yes |

## Permissible potential difference

between S- and MANA (UCM)	8 V DC
---------------------------	--------

## Isolation

Isolation tested with	707 V DC (type test)
-----------------------	----------------------

## Ambient conditions

### Ambient temperature during operation

- |                                 |       |
|---------------------------------|-------|
| • horizontal installation, min. | 0 °C  |
| • horizontal installation, max. | 60 °C |
| • vertical installation, min.   | 0 °C  |
| • vertical installation, max.   | 40 °C |

## Decentralized operation

Prioritized startup	No
---------------------	----

## Dimensions

Width	25 mm
Height	147 mm
Depth	129 mm

## Weights

Weight, approx.	200 g
-----------------	-------

## Other

Note:	Supplied incl. 40-pole push-in front connectors
-------	---

<b>last modified:</b>	12/07/2016
-----------------------	------------